

Ø8mm

外置齿轮箱型

PMG08P 系列

步距角精度: $\pm 8\%$

电阻精度: $\pm 10\%$

电感精度: $\pm 20\%$

环境温度: $-10^{\circ}\text{C} \sim 50^{\circ}\text{C}$

绝缘电阻: 最小 $100\text{M}\Omega$ (500VDC条件下)

耐压强度: $650 \pm 50\text{V}$ AC下持续2秒 (有效值)

绝缘等级: E级



小尺寸



低转速




高力矩

技术参数

系列	型号	步距角	相数	电压	电流	电阻	减速比	牵入频率	牵入转矩	保持转矩	外形图	接线图
		$^{\circ}$										
PMG08P20	PMG08P20-01	18	2	3.3	0.2	16.3	20:1	600	60/200	300	1	A
PMG08P50	PMG08P50-01	18	2	3.0	0.3	10	50:1	400	150/200	250	1	A

外形图

图1

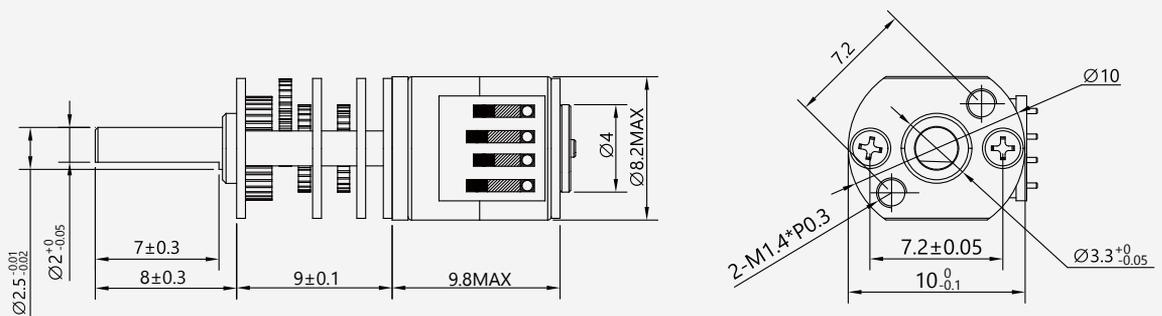

接线图

