

# Ø10mm

## 外置齿轮箱型

### PMG10P 系列

步距角精度: ±8%

电阻精度: ±10%

电感精度: ±20%

环境温度: -10°C~50°C

绝缘电阻: 最小100MΩ (500VDC条件下)

耐压强度: 650±50V AC下持续2秒 (有效值)

绝缘等级: E级



小尺寸



低转速



高力矩

### 技术参数

系列	型号	步距角	相数	电压	电流	电阻	减速比	牵入频率	牵入转矩	保持转矩	外形图	接线图
		°		V	A	Ω		pps	g.cm/pps	g.cm	Fig	Wdg
PMG10P20	PMG10P20-01	18	2	5.0	0.5	10	20:1	600	80/200	200	1	A
PMG10P50	PMG10P50-01	18	2	5.0	0.25	20	50:1	400	200/200	500	2	A

### 外形图

图1


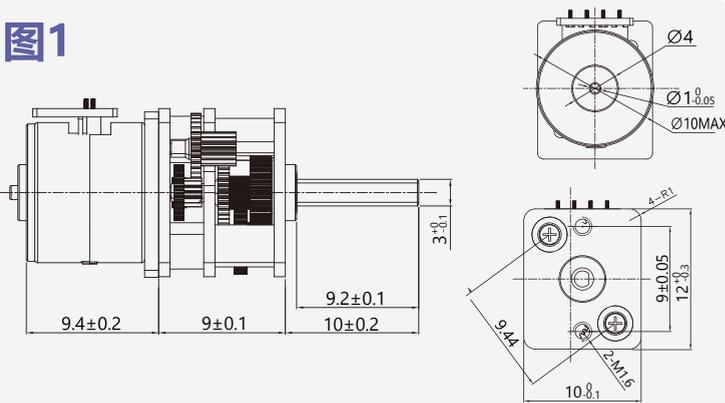


图2



### 接线图

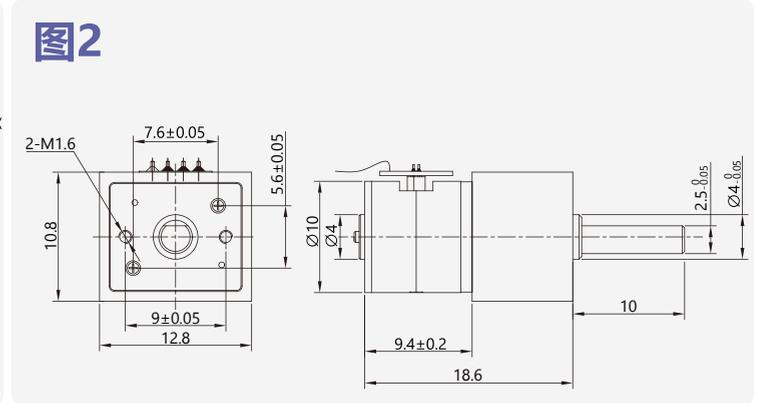