

Ø15mm

外置齿轮箱型

PMG15P 系列

- 步距角精度: $\pm 8\%$
- 电阻精度: $\pm 10\%$
- 电感精度: $\pm 20\%$
- 环境温度: $-10^{\circ}\text{C} \sim 50^{\circ}\text{C}$
- 绝缘电阻: 最小 $100\text{M}\Omega$ (500VDC条件下)
- 耐压强度: $650 \pm 50\text{V AC}$ 下持续2秒 (有效值)
- 绝缘等级: E级



小尺寸



低转速



高力矩

外形图

图1

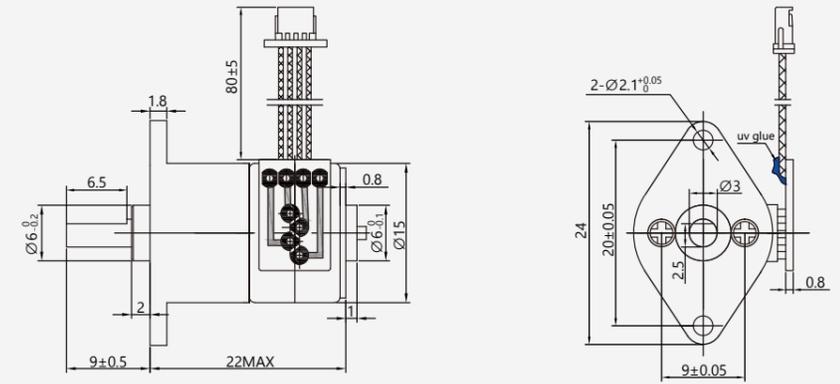


图2


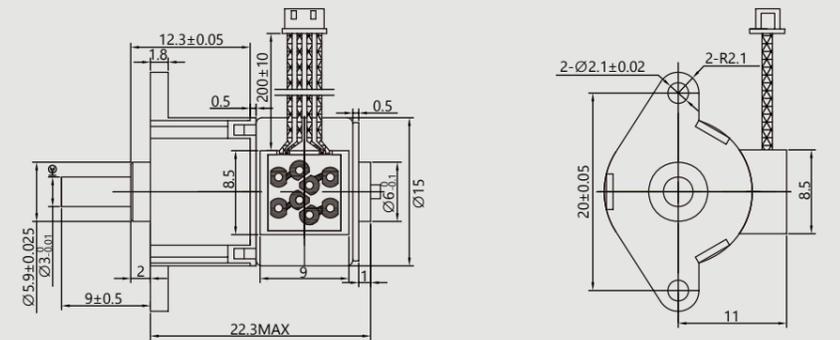


图3

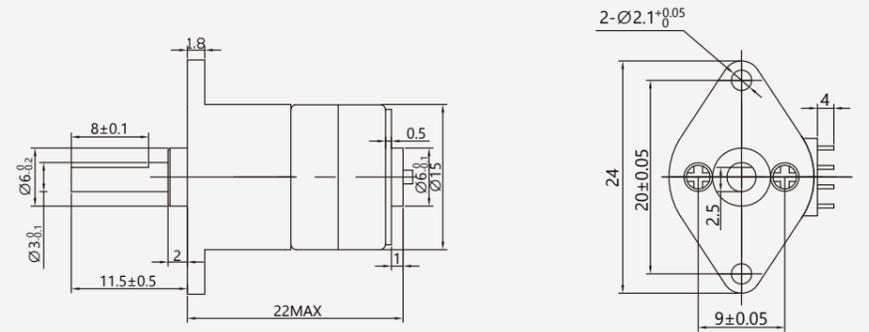

技术参数

系列	型号	步距角	相数	电压	电流	电阻	减速比	牵入频率	牵入转矩	保持转矩	外形图	接线图
		°		V	A	Ω		pps	g.cm/pps	g.cm		Fig
PMG15P10	PMG15P10-02	18	2	5	0.53	9.5	10:1	900	80/200	300	1	A
PMG15P50	PMG15P50-05	18	2	5	0.5	10	50:1	1280	280/200	1350	2	A
	PMG15P50-28	18	2	3	0.33	9	50:1	800	300/350	800	3	A
	PMG15P50-31	18	2	5	0.83	6	50:1	1100	550/350	850	1	A
PMG15P100	PMG15P100-05	18	2	3	0.5	6	100:1	900	700/100	1250	1	A
PMG15P102.5	PMG15P102.5-05	18	2	5	0.5	10	102.5:1	1000	350/200	2000	2	A

接线图

