


Ø25mm

外置齿轮箱型

PMG25P 系列

步距角精度: ±8%
 电阻精度: ±10%
 电感精度: ±20%
 环境温度: -10°C~50°C
 绝缘电阻: 最小100MΩ (500VDC条件下)
 耐压强度: 650±50V AC下持续2秒 (有效值)
 绝缘等级: E级







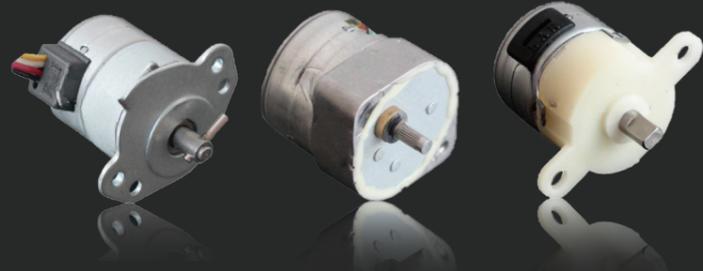


技术参数

系列	型号	步距角	相数	电压	电流	电阻	减速比	牵入频率	牵入转矩	保持转矩	外形图	接线图
		°		V	A	Ω		pps	g.cm/pps	g.cm		
PMG25P05	PMG25P05-02	7.5	2	3.5	0.36	9.6	5:1	420	100/200	500	1	A
PMG25P10	PMG25P10-01	7.5	4	5	0.5	10	10:1	720	400/100	1100	2	C
PMG25P15	PMG25P15-01	7.5	4	12	0.1	120	15:1	500	280/200	1000	1	B
PMG25P20	PMG25P20-01	15	4	12	0.08	150	20:1	600	500/100	1000	1	C
	PMG25P20-37	7.5	2	5	0.5	10	20:1	650	900/100	2500	2	A
PMG25P30	PMG25P30-01	7.5	4	4	0.11	120	30:1	680	750/300	4000	1	C
	PMG25P30-05	7.5	4	5	0.26	19.6	30:1	530	500/100	2000	3	B
PMG25P49	PMG25P49-02	7.5	2	12	0.3	20	47.32:1	900	2000/500	8000	4	A
	PMG25P49-11	7.5	2	12	0.3	20	47.32:1	900	2000/500	8000	5	A
PMG25P60	PMG25P60-06	7.5	2	12	0.12	100	60:1	650	2200/200	5000	6	A
PMG25P75	PMG25P75-01	7.5	4	12	0.083	145	75:1	690	1100/410	7500	1	C
PMG25P76	PMG25P76-01	15	4	5	0.25	20	76:1	430	720/200	5000	7	C
PMG25P100	PMG25P100-15	7.5	2	12	0.1	12.7	100:1	560	1200/200	3000	2	A

外形图

图1

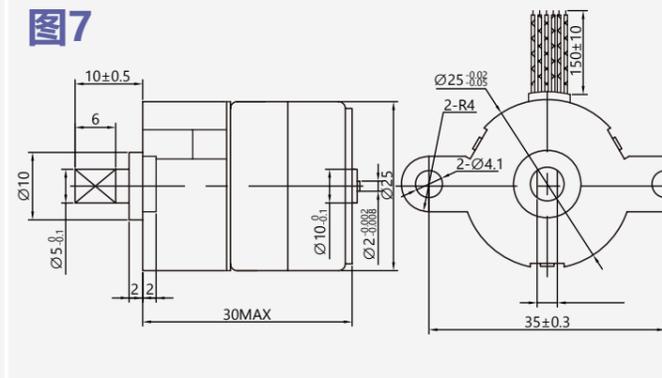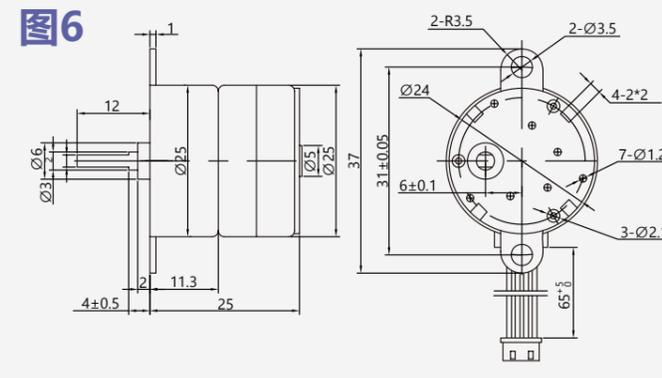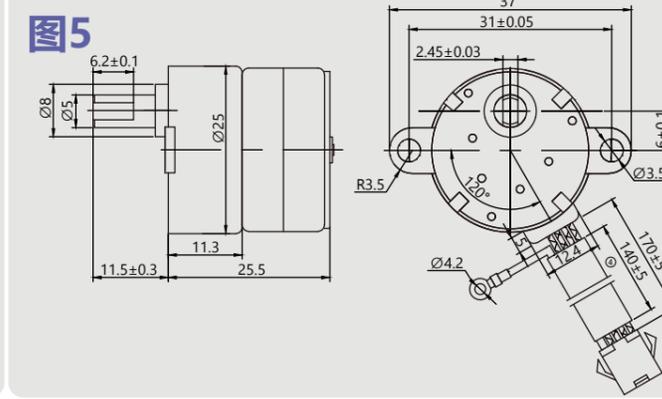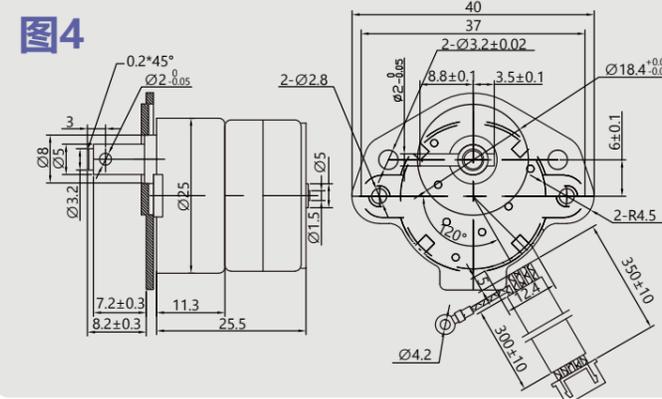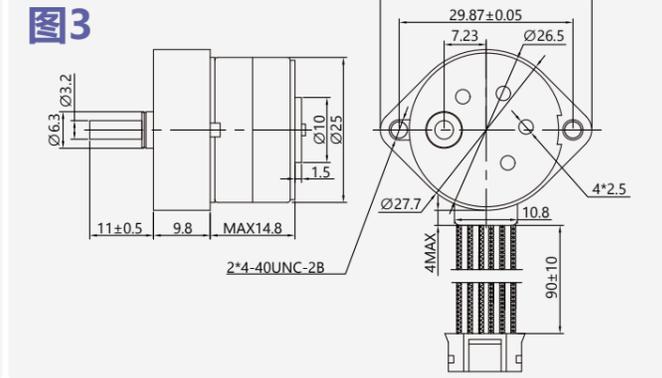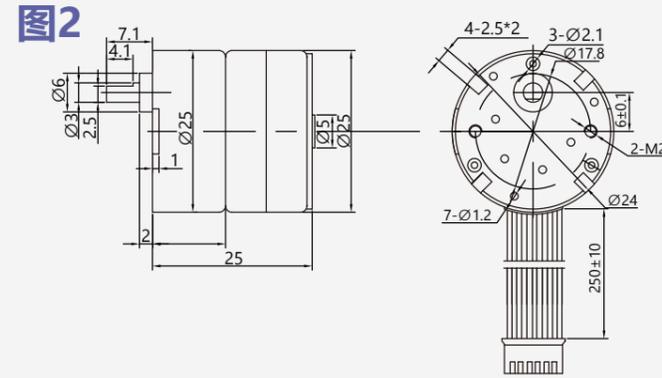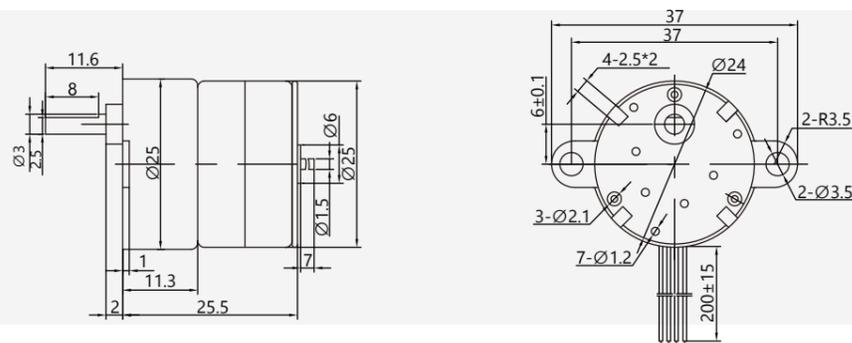

接线图

