

Ø35mm

外置齿轮箱型

PMG35P 系列

步距角精度: ±8%

电阻精度: ±10%

电感精度: ±20%

环境温度: -10°C~50°C

绝缘电阻: 最小100MΩ (500VDC条件下)

耐压强度: 650±50V AC下持续2秒 (有效值)

绝缘等级: E级



小尺寸



低转速




高力矩

技术参数

系列	型号	步距角	相数	电压	电流	电阻	减速比	牵入频率	牵入转矩	保持转矩	外形图	接线图
		°		V	A	Ω		pps	g.cm/pps	g.cm		Fig
PMG35P02	PMG35P02-04	7.5	4	12	0.4	30	2:1	270	270/200	1500	1	B
PMG35P05	PMG35P05-02	7.5	4	12	0.4	30	5:1	360	700/200	2500	1	B
PMG35P06	PMG35P06-03	7.5	4	12	0.4	30	6:1	360	800/200	3000	1	B
PMG35P08	PMG35P08-01	7.5	4	12	0.4	30	8.4:1	370	800/300	2000	1	B
PMG35P10	PMG35P10-01	7.5	2	12	0.27	45	10.8:1	320	1200/100	2300	2	A
PMG35P19	PMG35P19-01	7.5	4	12	0.4	30	19:1	360	2500/200	10000	1	B
PMG35P30	PMG35P30-01	7.5	4	12	0.4	30	30:1	360	2500/300	12000	1	B
PMG35P50	PMG35P50-02	15	2	12	0.133	90	50:1	300	1700/100	10000	3	A
PMG35P60	PMG35P60-01	7.5	4	12	0.4	30	60:1	370	3000/300	10000	1	B
	PMG35P60-20	7.5	2	12	0.4	30	60:1	420	5000/500	8000	4	A
PMG35P75	PMG35P75-03	7.5	4	24	0.5	48	75:1	410	4000/400	7000	2	C
PMG35P100	PMG35P100-01	15	2	6	0.32	18.5	100:1	310	5000/100	10000	5	A
PMG35P120	PMG35P120-01	7.5	4	12	0.4	30	120:1	370	8000/300	10000	1	B
PMG35P266	PMG35P266-01	7.5	4	12	0.4	30	266:1	280	10000/200	12000	6	B

外形图

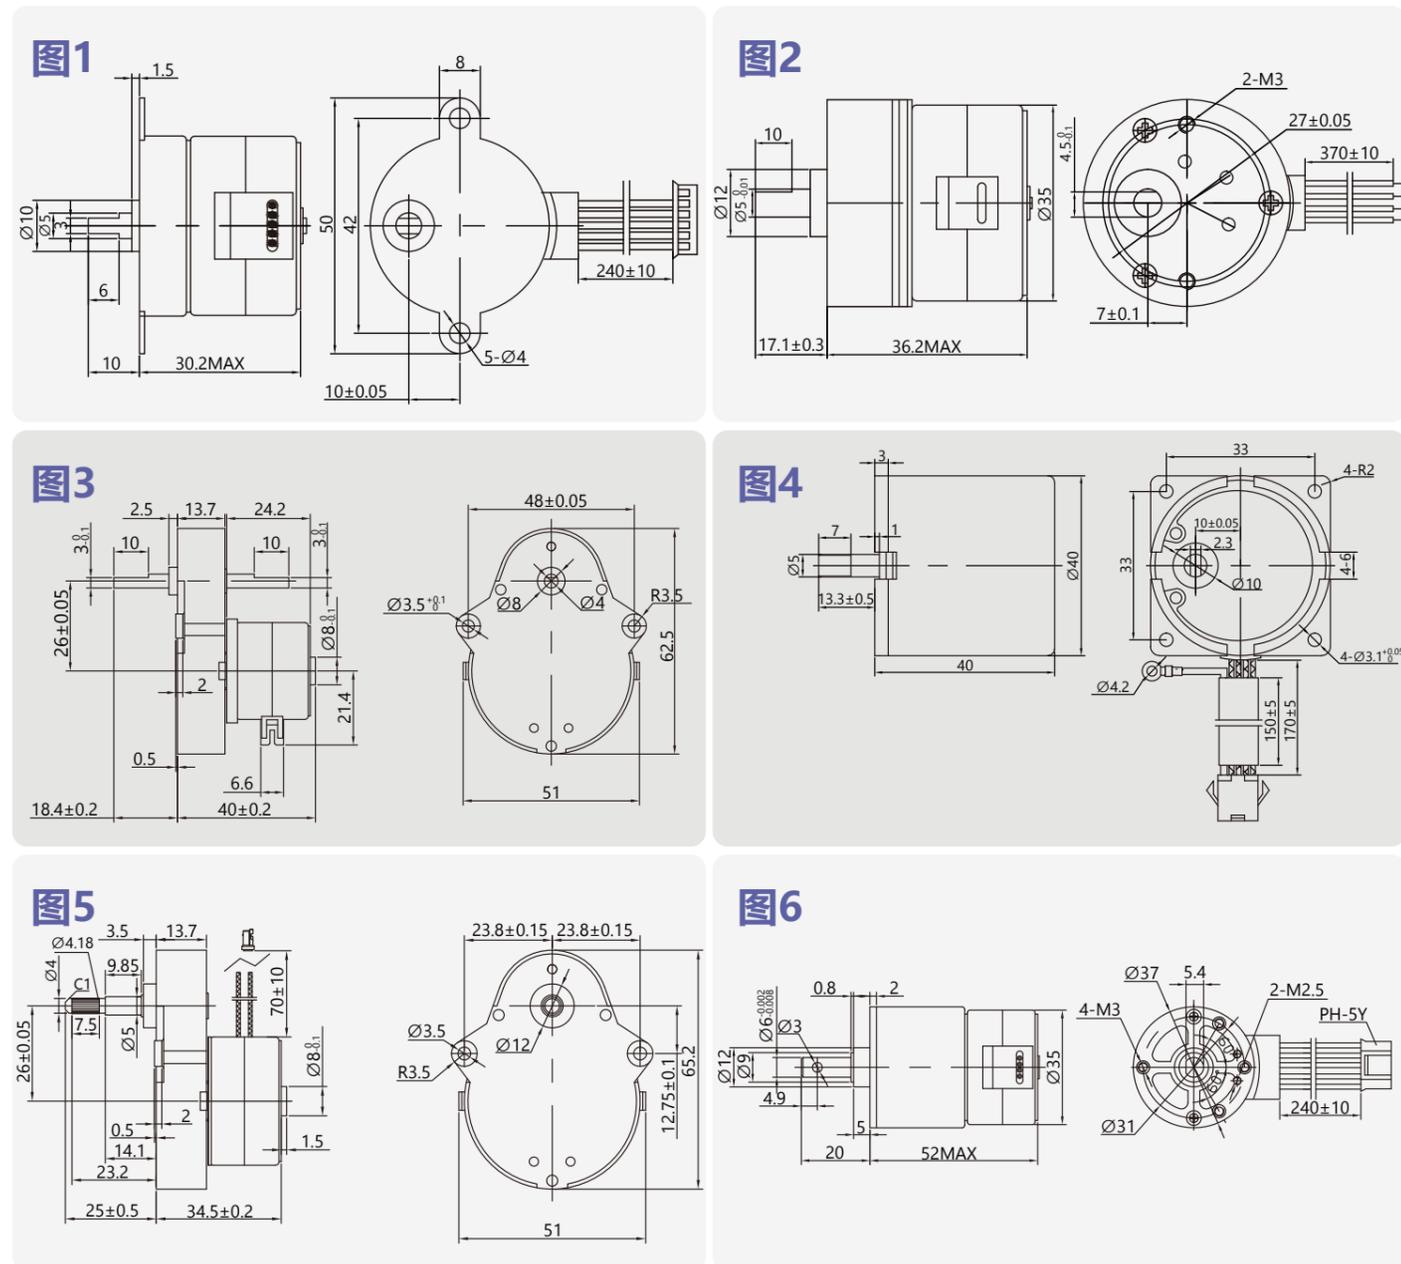

接线图

