

Ø42mm

外置齿轮箱型

PMG42P 系列

步距角精度: $\pm 8\%$
 电阻精度: $\pm 10\%$
 电感精度: $\pm 20\%$
 环境温度: $-10^{\circ}\text{C} \sim 50^{\circ}\text{C}$
 绝缘电阻: 最小 $100\text{M}\Omega$ (500VDC条件下)
 耐压强度: $650 \pm 50\text{V}$ AC下持续2秒 (有效值)
 绝缘等级: E级



小尺寸



低转速











高力矩

技术参数

系列	型号	步距角	相数	电压	电流	电阻	减速比	牵入频率	牵入转矩	保持转矩	外形图	接线图
		$^{\circ}$										V
PMG42P03	PMG42P03-01	7.5	2	12	0.22	54	3:1	270	800/200	2000	1	A
PMG42P05	PMG42P05-01	7.5	4	12	0.5	10.7	5:1	450	1300/100	5000	2	C
PMG42P07	PMG42P07-01	7.5	2	12	0.22	54	7:1	300	1000/200	3000	1	A
PMG42P10	PMG42P10-6A	7.5	2	24	0.133	180	10:1	260	1600/100	7000	3	A
PMG42P15	PMG42P15-01	7.5	4	12	0.18	66	15:1	270	1500/100	9000	2	C
PMG42P20	PMG42P20-01	15	4	12	0.18	66	20:1	240	1200/100	6000	4	C
PMG42P24	PMG42P24-01	7.5	4	12	0.44	27	24:1	380	1600/200	13000	5	B
PMG42P25	PMG42P25-06	7.5	4	24	0.08	300	25:1	260	1000/100	10000	6	B
PMG42P30	PMG42P30-01	15	4	12	0.18	66	30:1	240	1700/100	5000	7	C
PMG42P50	PMG42P50-19	7.5	2	5	0.56	9	50:1	230	6500/200	10000	8	A

外形图

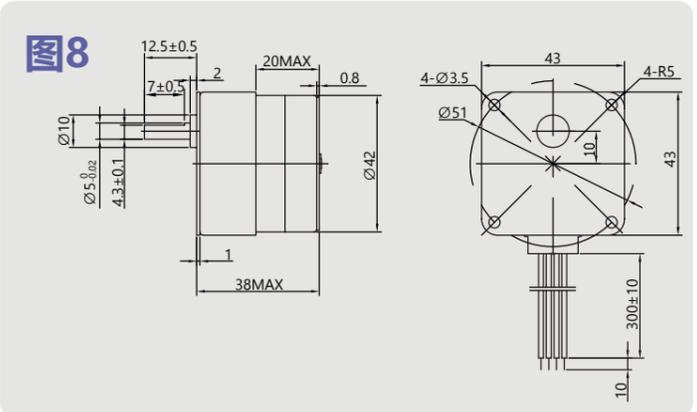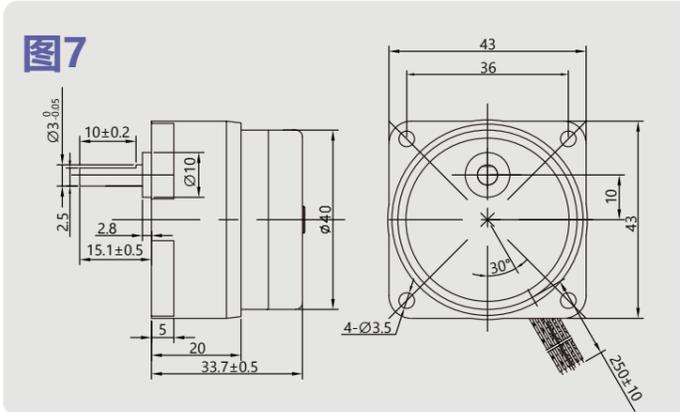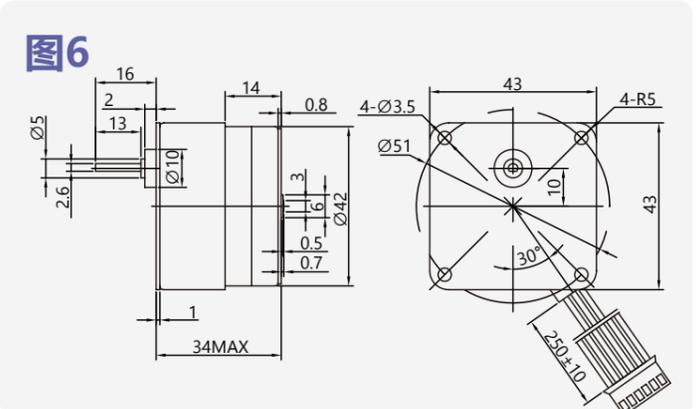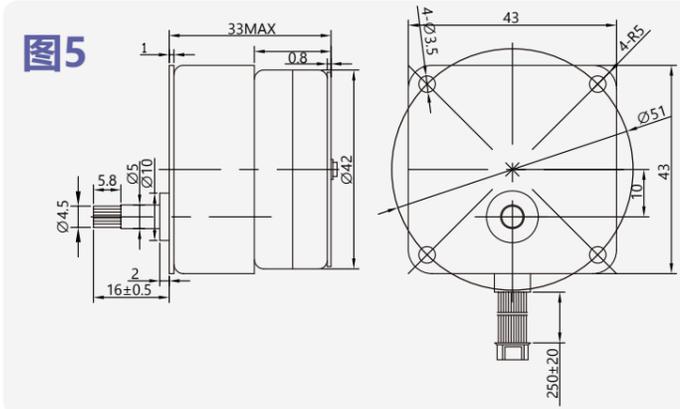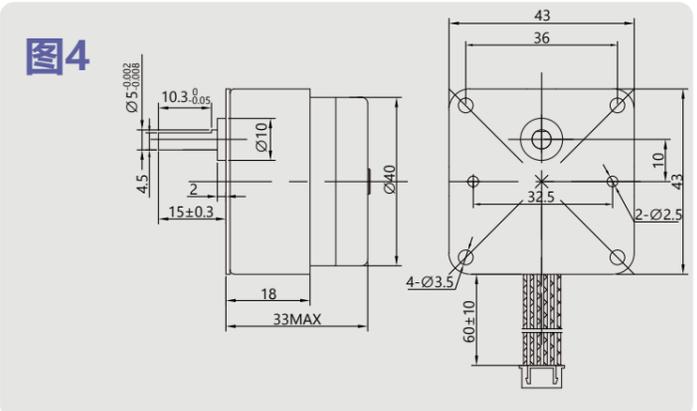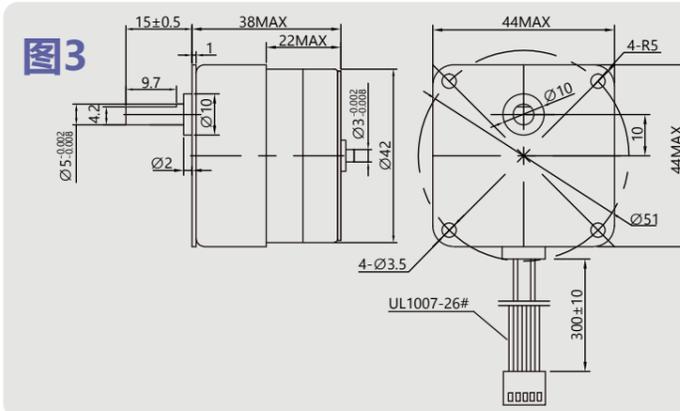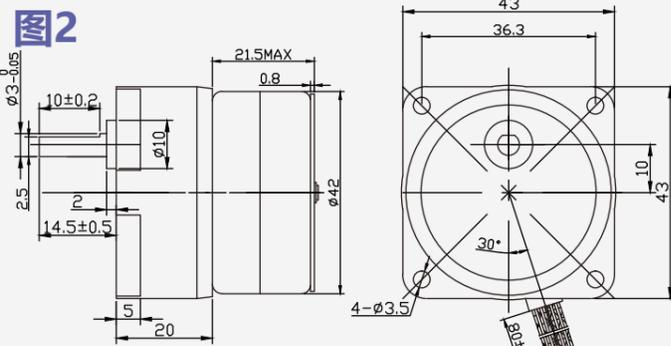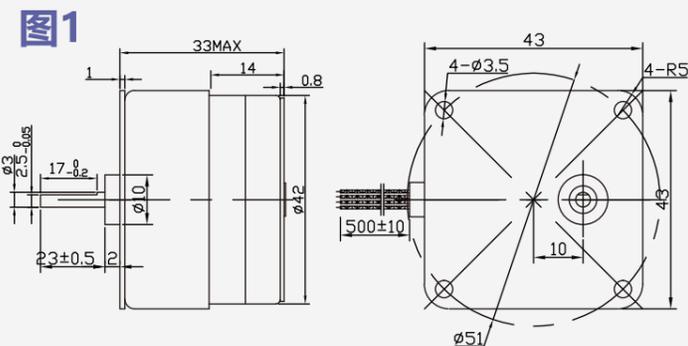

接线图

