

# Ø8mm 18° PMS08 系列

步距角精度: ±8% (整步, 空载)  
 电阻精度: ±10%  
 电感精度: ±20%  
 环境温度: -10°C~50°C  
 绝缘电阻: 最小100MΩ (500VDC条件下)  
 耐压强度: 650±50V AC下持续2秒 (有效值)  
 绝缘等级: E级



小尺寸



低惯量



快速响应

## 技术参数

系列	型号	步距角	相数	电压	电流	电阻	牵入频率	牵入转矩	保持转矩	定位转矩	外形图	接线图
		°										
PMS08L20	PMS08L20-01	18	2	3.3	0.2	16.3	800	2/200	10.0	5.0	1	A
	PMS08L20-02	18	2	3.0	0.3	10	800	4/200	10.0	5.0	2	A
	PMS08L20-03	18	2	5.0	0.17	30	800	4.5/200	10.0	5.0	3	A

## 外形图

图1

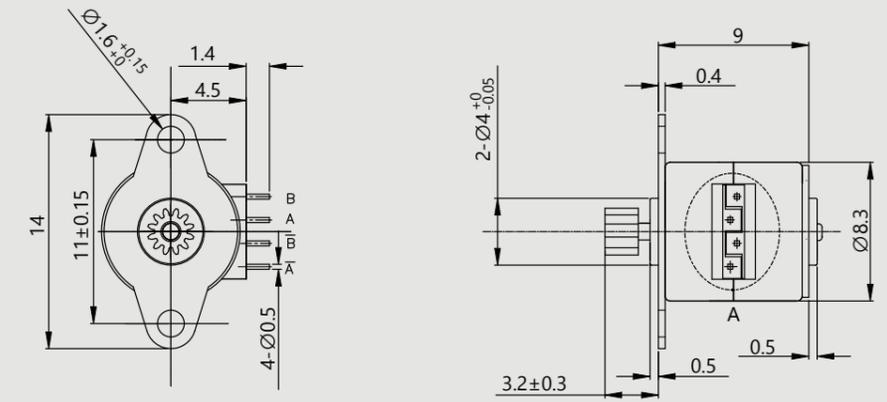


图2


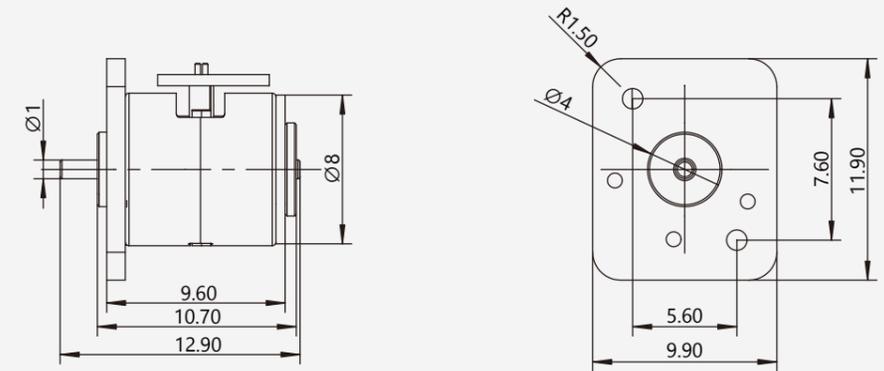


图3



## 接线图

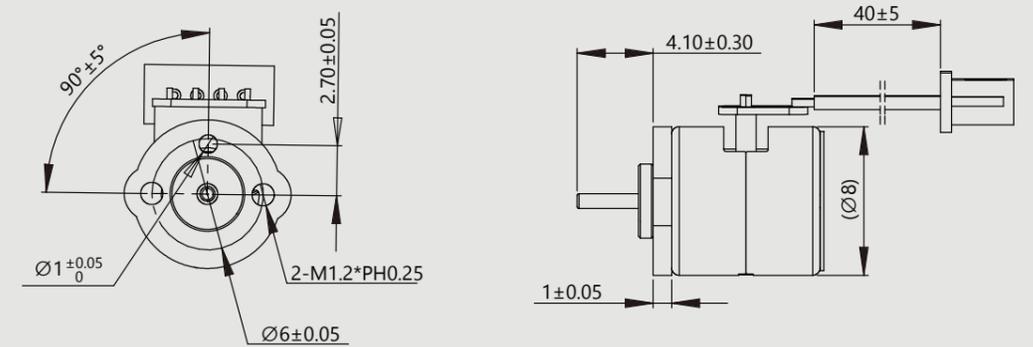