

# Ø10mm 18° PMS10 系列

步距角精度: ±8% (整步, 空载)  
 电阻精度: ±10%  
 电感精度: ±20%  
 环境温度: -10°C~50°C  
 绝缘电阻: 最小100MΩ (500VDC条件下)  
 耐压强度: 650±50V AC下持续2秒 (有效值)  
 绝缘等级: E级



小尺寸



低惯量



快速响应

## 外形图

图1

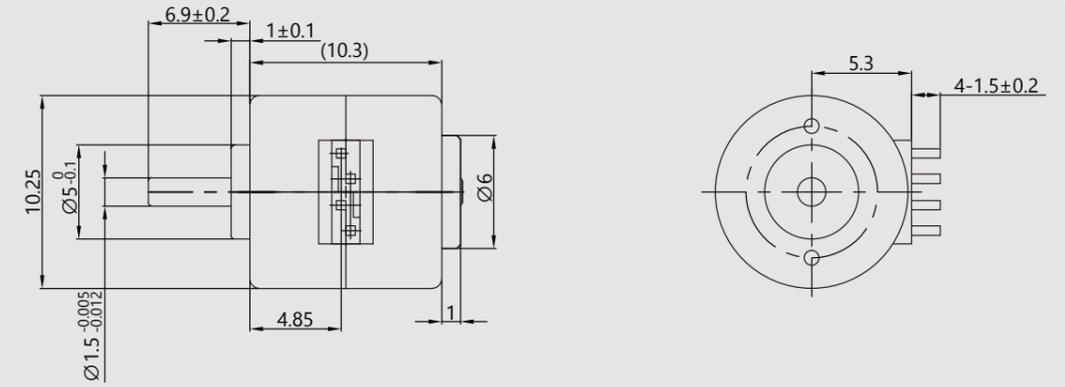


图2


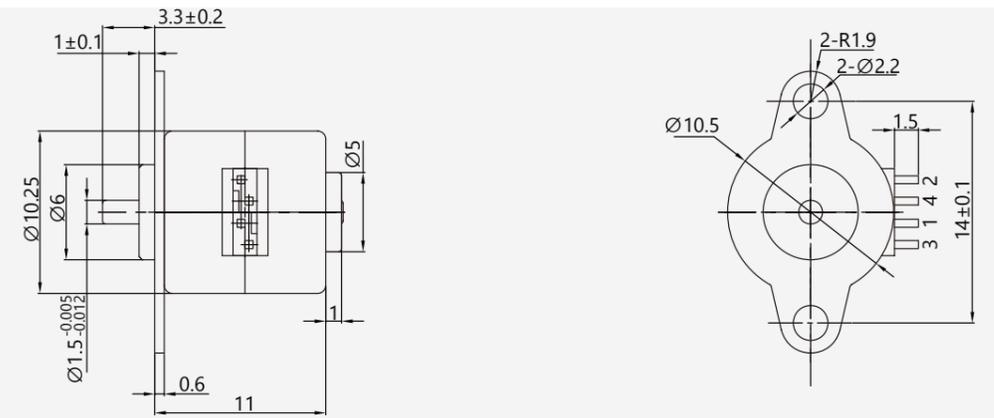


图3

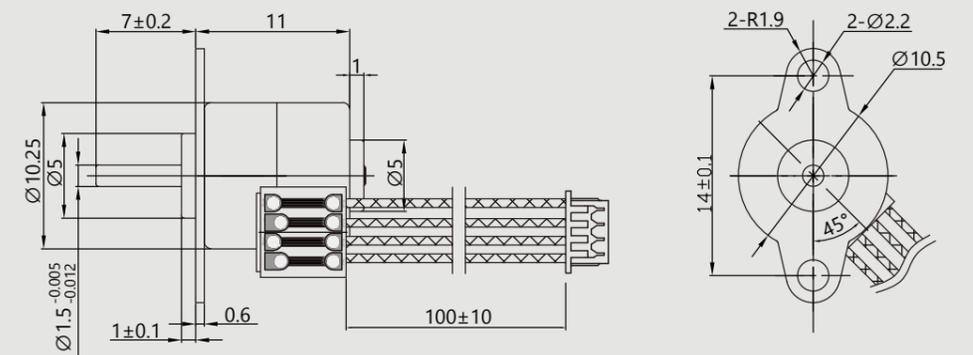

## 技术参数

系列	型号	步距角	相数	电压	电流	电阻	牵入频率	牵入转矩	保持转矩	定位转矩	外形图	接线图
		°										
PMS10L20	PMS10L20-01	18	2	3.3	0.22	15	800	6/500	16.3	10	1	A
	PMS10L20-04	18	2	3.3	0.22	15	800	6/500	16.3	10	2	A
	PMS10L20-05	18	2	5.2	0.2	26	800	12/500	20	10	3	A

## 接线图

