

Ø25mm 7.5°/15° PMS25 系列

步距角精度: ±8% (整步, 空载)

电阻精度: ±10%


电感精度: ±20%

环境温度: -10°C~50°C

绝缘电阻: 最小100MΩ (500VDC条件下)

耐压强度: 650±50V AC下持续2秒 (有效值)

绝缘等级: E级

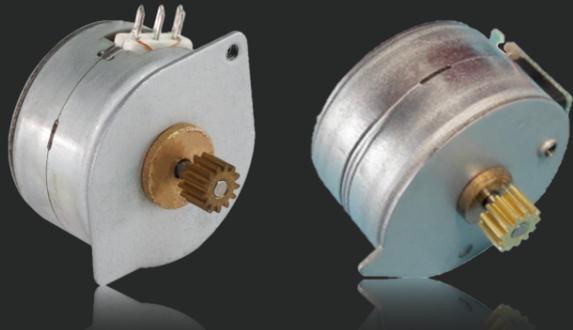

小尺寸



低惯量



快速响应

技术参数

| 系列 | 型号 | 步距角 | 相数 | 电压 | 电流 | 电阻 | 牵入频率 | 牵入转矩 | 保持转矩 | 定位转矩 | 外形图 | 接线图 |
|----------|-------------|-----|----|----|-------|----|------|--------|------|------|-----|-----|
| | | ° | | V | A | | | | | | | |
| PMS25S48 | PMS25S48-02 | 7.5 | 4 | 12 | 0.375 | 32 | 850 | 30/100 | 130 | 30 | 1 | A |
| | PMS25S48-40 | 7.5 | 2 | 5 | 0.25 | 20 | 580 | 20/100 | 90 | 30 | 2 | A |
| PMS25L24 | PMS25L24-01 | 15 | 4 | 9 | 0.45 | 20 | 600 | 20/200 | 135 | 60 | 3 | C |
| | PMS25L24-02 | 15 | 4 | 12 | 0.4 | 30 | 580 | 40/100 | 130 | 75 | 4 | C |
| | PMS25L24-40 | 15 | 2 | 24 | 0.275 | 16 | 870 | 40/100 | 125 | 70 | 5 | A |
| PMS25L48 | PMS25L48-01 | 7.5 | 4 | 5 | 0.5 | 10 | 750 | 40/100 | 120 | 45 | 6 | C |
| | PMS25L48-29 | 7.5 | 4 | 24 | 0.4 | 60 | 950 | 60/200 | 200 | 50 | 7 | C |

外形图

图1

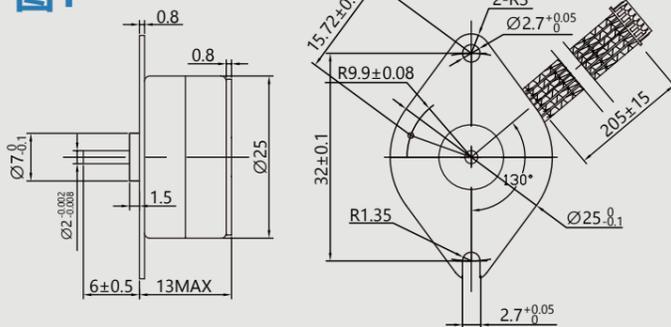


图2

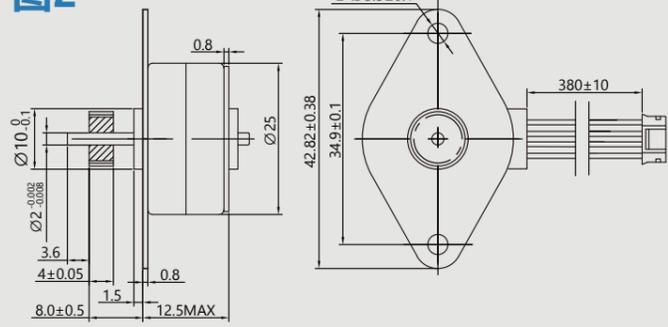


图3

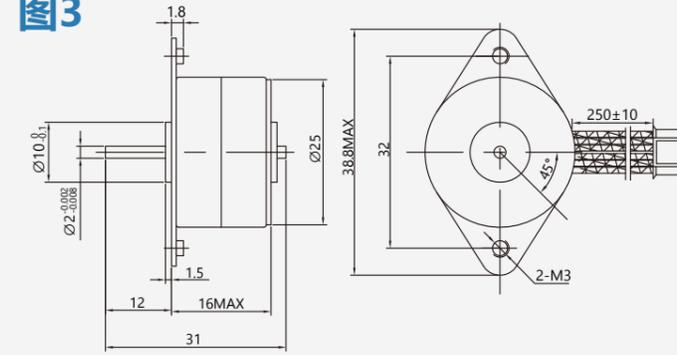


图4

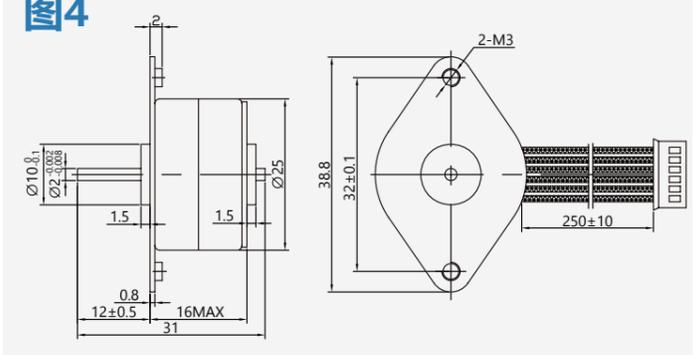


图5

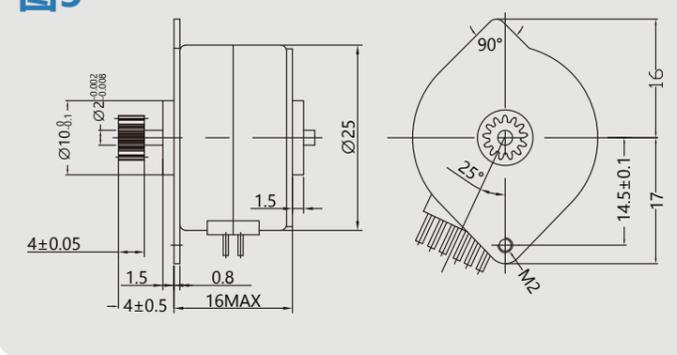


图6



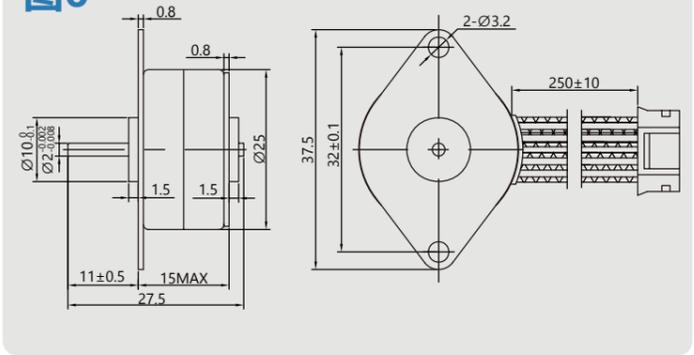


图7

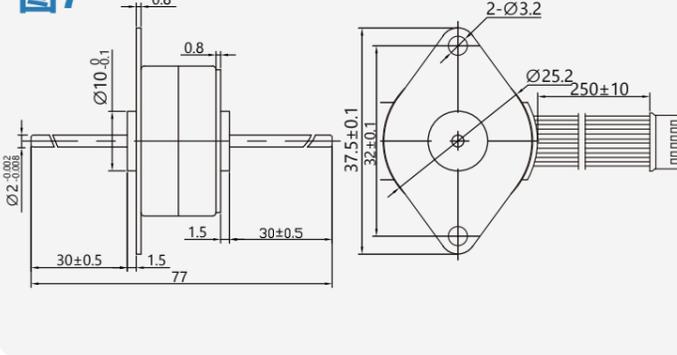


接线图

Wdg A



Wdg B



Wdg C

