


Ø35mm 7.5°/15° PMS35 系列










步距角精度: ±8% (整步, 空载)
 电阻精度: ±10%
 电感精度: ±20%
 环境温度: -10°C~50°C
 绝缘电阻: 最小100MΩ (500VDC条件下)
 耐压强度: 650±50V AC下持续2秒 (有效值)
 绝缘等级: E级

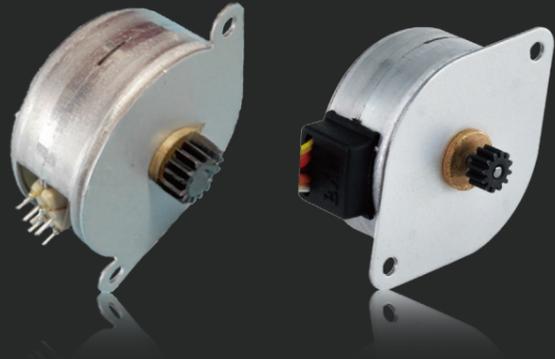

技术参数

系列	型号	步距角	相数	电压	电流	电阻	牵入频率	牵入转矩	保持转矩	定位转矩	外形图	接线图
		°										
PMS35S48	PMS35S48-02	7.5	4	12	0.26	47	420	80/200	300	65	1	B
	PMS35S48-50	7.5	2	24	0.48	50	750	270/150	500	40	2	A
	PMS35S48-1B	7.5	2	5	0.67	7.5	430	75/200	400	75	3	A
PMS35L24	PMS35L24-01	15	4	24	0.282	85	430	110/100	450	125	4	B
	PMS35L24-05	15	2	12	0.12	100	150	35/100	360	200	5	A
PMS35L48	PMS35L48-01	7.5	2	12	0.2	60	350	100/200	550	125	6	A
	PMS35L48-02	7.5	4	24	0.22	110	350	90/100	550	45	7	B
	PMS35L48-09	7.5	4	18	1.3	13.5	580	120/200	800	125	8	B
	PMS35L48-59	7.5	4	24	0.5	5.5	390	185/100	650	130	9	B

外形图

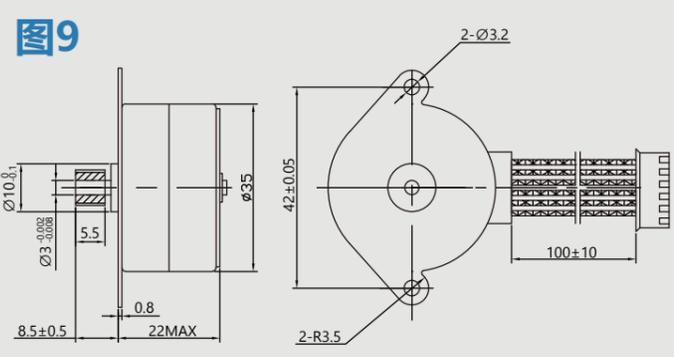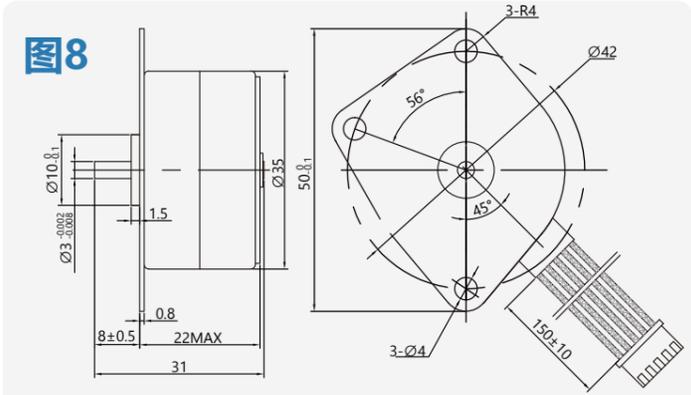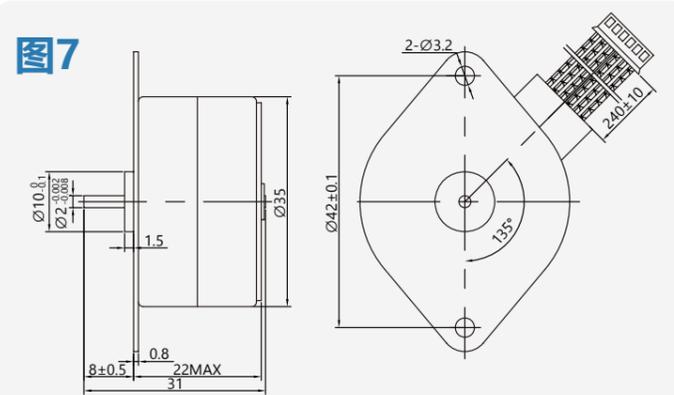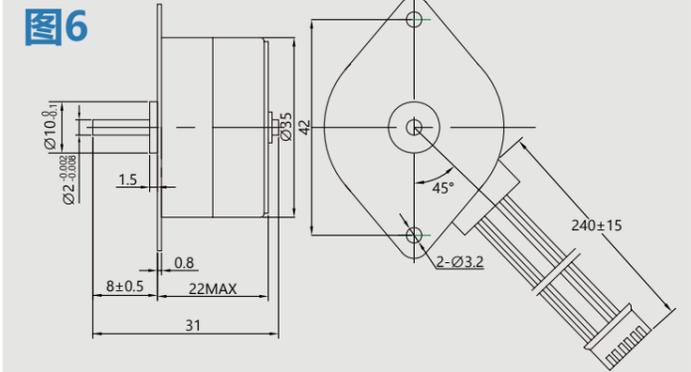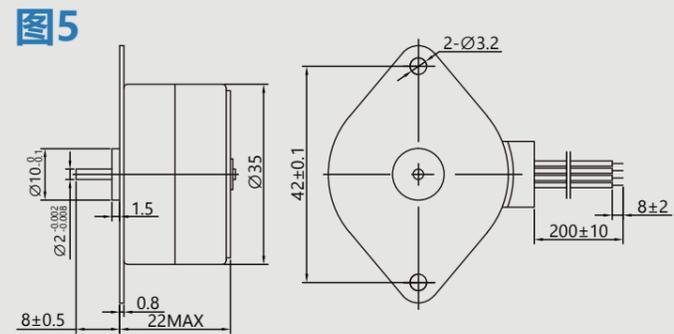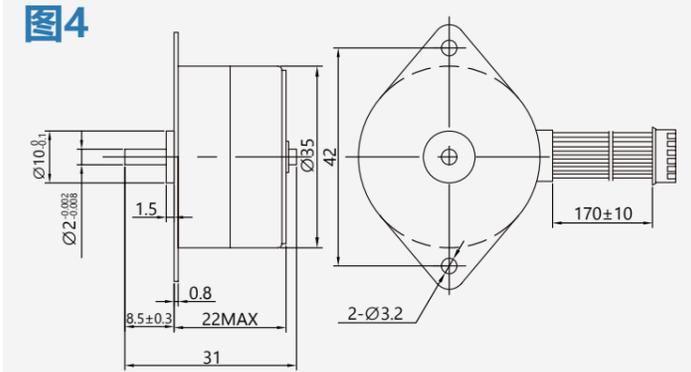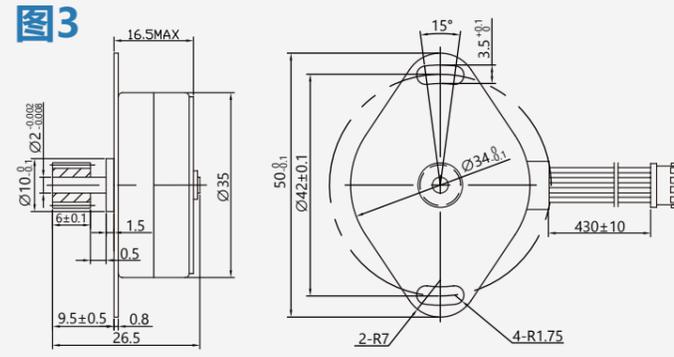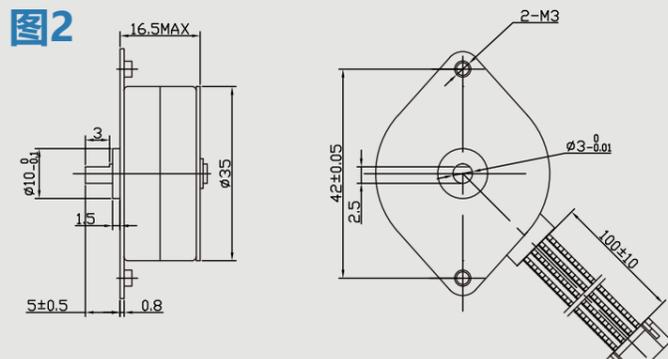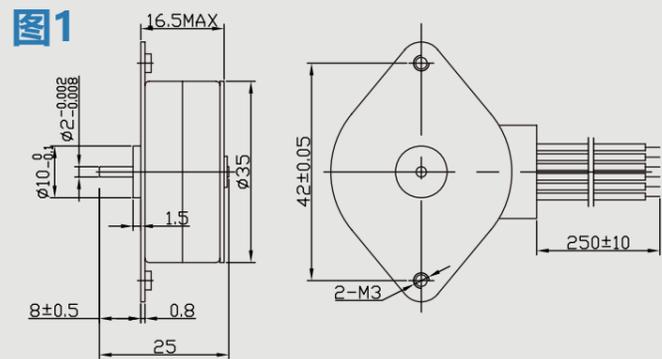

接线图

