


# Ø42mm 7.5°/3.75°/3.6° PMS42 系列









步距角精度: ±8% (整步, 空载)  
电阻精度: ±10%  
电感精度: ±20%  
环境温度: -10°C~50°C  
绝缘电阻: 最小100MΩ (500VDC条件下)  
耐压强度: 650±50V AC下持续2秒 (有效值)  
绝缘等级: E级

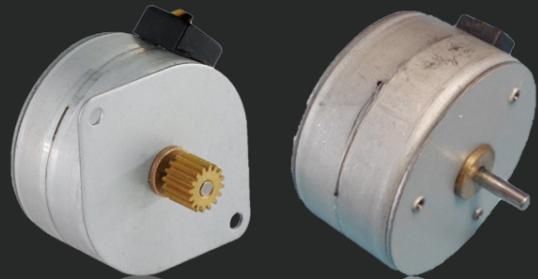

## 技术参数

系列	型号	步距角	相数	电压	电流	电阻	牵入频率	牵入转矩	保持转矩	定位转矩	外形图	接线图
		°										
PMS42S48	PMS42S48-01	7.5	4	12	0.3	40	350	70/200	550	100	1	B
	PMS42S48-03	7.5	2	24	0.75	8	550	340/100	900	120	2	A
	PMS42S48-11	7.5	4	12	0.21	57	310	95/200	650	100	3	B
PMS42L48	PMS42L48-02	7.5	4	24	0.24	100	340	270/100	800	210	4	B
	PMS42L48-4H	7.5	2	24	0.6	5.8	550	450/100	700	280	5	A
	PMS42L48-09	7.5	2	9	0.58	15.5	530	120/500	800	125	6	B
	PMS42L48-10	7.5	2	5	0.96	5.2	250	500/100	1200	210	7	A
PMS42S96	PMS42S96-10	3.75	2	5	0.42	12	350	160/100	500	110	8	A
PMS42S100	PMS42S100-03	3.6	4	12	0.16	75	380	14/300	420	60	9	C

## 外形图

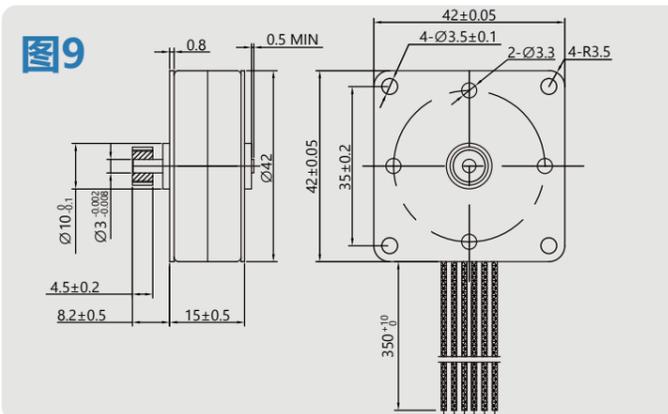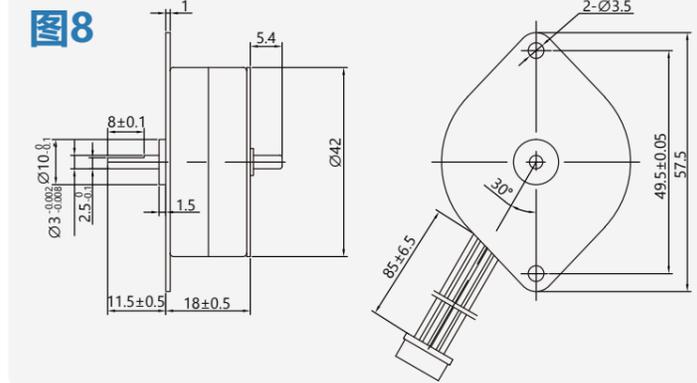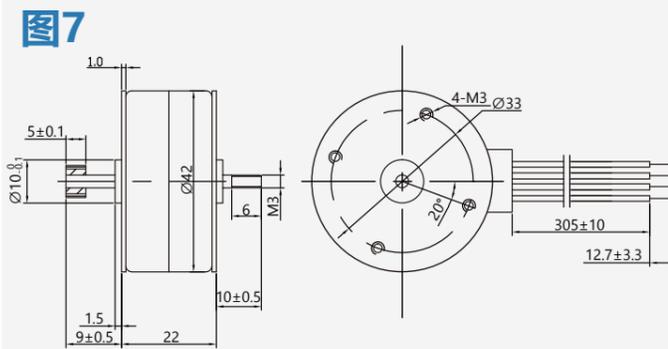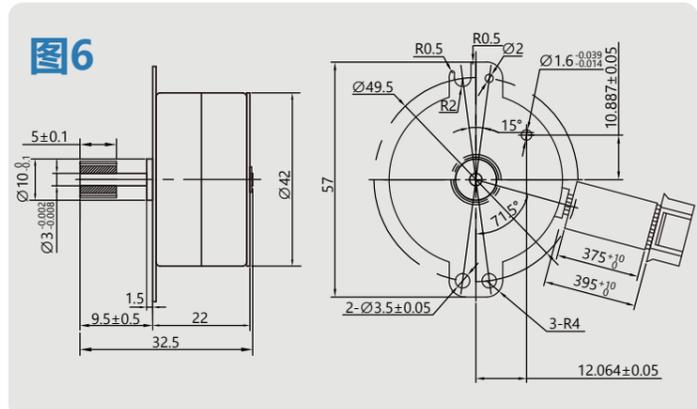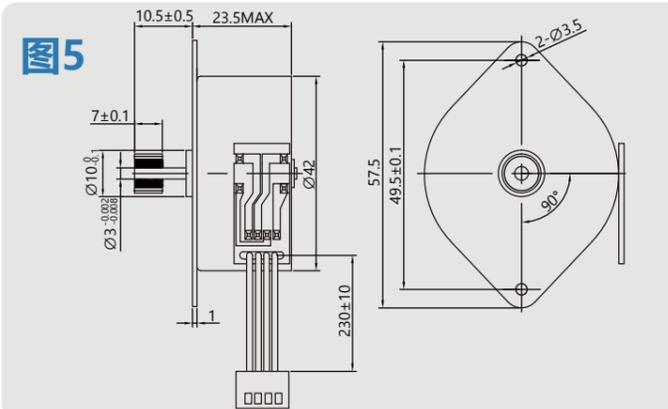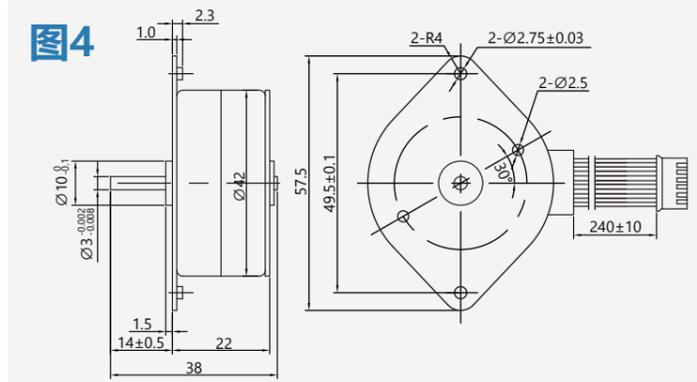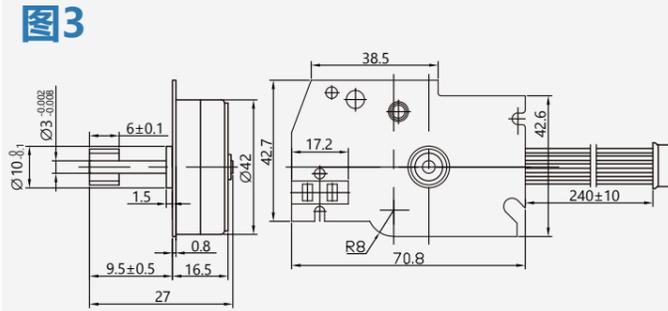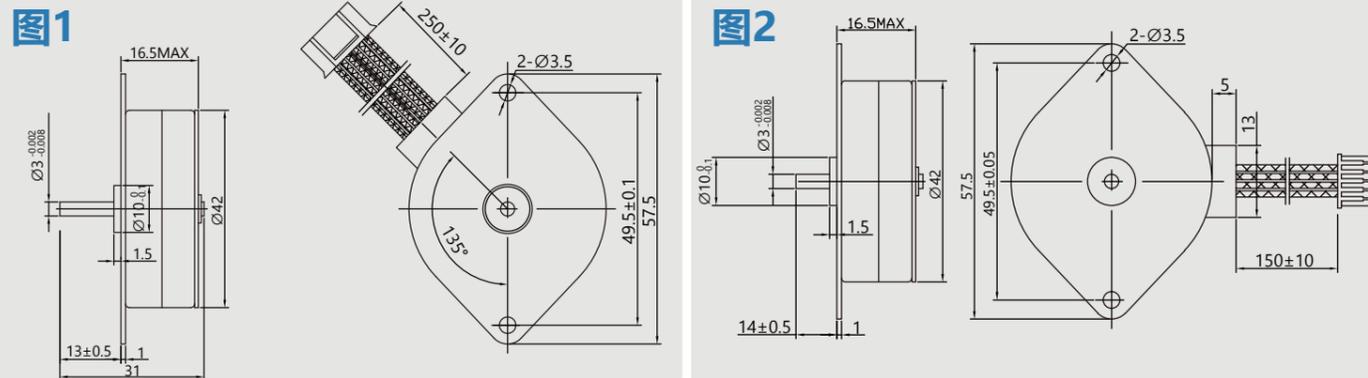

## 接线图

